

A

15355 U.S. PTO
07/27/98

LIMBACH & LIMBACH L.L.P.
2001 Ferry Building, San Francisco, CA 94111
415/433-4150

Address to:

Box Patent Application
Assistant Commissioner for Patents
Washington, D.C. 20231

Attorney's Docket No. SONY-P8776

[S98P0776US00]

First Named Inventor KOICHIRO WATANABE

UTILITY PATENT APPLICATION TRANSMITTAL

(under 37 CFR 1.53(b))

SIR:

Transmitted herewith for filing is the patent application entitled:

AUDIO CONTROL SIGNAL TRANSMISSION APPARATUS AND RECEPTION APPARATUS,
CONTROL SYSTEM AND CONTROL METHOD USING AN AUDIO CONTROL SIGNAL, PROGRAM
INFORMATION TRANSMISSION APPARATUS AND TRANSMISSION METHOD, AND PROGRAM
RESERVATION APPARATUS AND PROGRAM RESERVATION METHOD

CERTIFICATION UNDER 37 CFR § 1.10

I hereby certify that this New Application and the documents referred to as enclosed herein are being deposited with the United States Postal Service on this date July 27, 1998, in an envelope bearing "Express Mail Post Office To Addressee" Mailing Label Number EM502815713US, addressed to: Box Patent Application, Assistant Commissioner for Patents, Washington, D.C. 20231.

HOWARD WONG

(Name of person mailing paper)

(Signature)

Enclosed are:

1. ☒ Transmittal Form (two copies required)
2. The papers required for filing date under CFR § 1.53(b):
 - i. 72 Pages of specification (including claims and abstract);
 - ii. 26 Sheets of drawings.
 ___ formal ☒ informal
3. Declaration or oath
 - a. ☒ (unsigned)
4. ___ Microfiche Computer Program (Appendix, see 37 CFR 1.96)
5. ___ Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary)
 - i. ___ Computer Readable Copy
 - ii. ___ Paper Copy (identical to computer copy)
 - iii. ___ Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

6. ___ An assignment of the invention to Sony Corporation is attached (including Form PTO-1595).
 - i. ___ 37 CFR 3.73(b) Statement (when there is an assignee)
 7. ☒ Power of Attorney (unsigned)
 8. ___ An Information Disclosure Statement (IDS) is enclosed, including a PTO-1449 and copies of ___ references.
 9. ___ Preliminary Amendment.
 10. ☒ Return Receipt Postcard (MPEP 503 -- should be specifically itemized)
 11. ___ Other
12. FOREIGN PRIORITY
[x] Priority of application no. P09-201868 filed on July 28, 1997 in Japan is claimed under 35 USC 119.

15318 U.S. PTO
09/12/123
07/27/98

X is filed herewith; or
- has been filed in prior application no. filed on , or
will be provided.

13. FEE CALCULATION

CLAIMS AS FILED

	Number Filed	Number Extra	Rate	Basic Fee (\$790)
Total Claims	63 - 20	* 43	x \$22.00	\$946
Independent Claims	8 - 3	* 5	x \$82.00	\$410
Multiple dependent claim(s), if any			\$270.00	

50% Filing Fee Reduction (if applicable) \$0

a. ☐ A small entity statement is enclosed.

b. ☐ A small entity statement was filed in the prior nonprovisional application and such status is still proper and desired.

c. ☐ is no longer claimed.

Total Fees Enclosed \$2146.00

☒ Check(s) in the amount of \$ 2146.00 enclosed.
☐ Charge Account No. 12-1420 in the amount of \$ ____.
A duplicate of this transmittal is attached.

Charles P. Sammut
Limbach & Limbach L.L.P.
2001 Ferry Building
San Francisco, CA 94111
Telephone: 415/433-4150
Facsimile: 415/433-8716

X The Commissioner is hereby authorized to charge any additional fees (or credit any overpayment) associated with this communication and which may be required under 37 CFR § 1.16 or § 1.17 to Account No. 12-1420. **A duplicate of this transmittal is attached.**

Charles P. Sammut
Registration No. 28,901
Attorney(s) or Agent(s) of Record

TITLE OF THE INVENTION

Audio Control Signal Transmission Apparatus and Reception Apparatus, Control System and Control Method Using an Audio Control Signal, Program Information Transmission Apparatus and Transmission Method, and Program Reservation Apparatus and Program Reservation Method

BACKGROUND OF THE INVENTION

Field of the Invention

The present invention relates to an audio control signal transmission apparatus and reception apparatus, control system and control method using an audio control signal, program information transmission apparatus and transmission method, and program reservation apparatus and program reservation method.

Description of the Prior Art

Conventionally, a television reception apparatus, a radio reception apparatus, a video tape recorder (VTR) having a television tuner mounted, and the like, have been controlled at a distance by using a remote controller based on infrared rays.

For example, in a video tape recorder (VTR) and a television reception apparatus having a timer reservation function, a recording reservation and a program reservation are carried out by operating the infrared-ray controller as follows.

(1) Set a timer at a reservation mode.

- (2) Set a start week and day of the week.
- (3) Set a start hour.
- (4) Set a start minute.
- (5) Set an end hour.
- (6) Set an end minute.
- (7) Set a channel to be reserved.
- (8) Set a timer reservation.

Among the aforementioned procedure steps (1) to (8), the steps (2) to (7) are carried out by setting a numeric using an up switch and a down switch for incrementing or decrementing by 1 digit, or using an input apparatus such as a 10-key switch and a bar code. Moreover, when reserving a program which is broadcast at the same time every day or every week, the a reservation is proclaimed each time so as to repeatedly use the program reservation information.

In a television reception apparatus, radio reception apparatus, video tape recorder (VTR) having a television tuner mounted, and the like, in addition to a function for receiving and demodulating an audio signal, it is necessary to provide a function for receiving and demodulating a remote control signal from a remote controller using an infrared ray so as to enable remote control using the remote controller.

Moreover, for a recording reservation and a program reservation in a video tape recorder (VTR) and a television reception apparatus having a timer reservation function, a user need to enter a necessary information for setting the reservation by looking at a program table.

SUMMARY OF THE INVENTION

It is therefore a first object of the present invention to realize a control system for transmitting a control signal superimposed an audio signal and controlling at a distance an apparatus which can receive the signal and an apparatus connected to this apparatus; and to provide an audio control signal transmission apparatus and reception apparatus and an audio control signal based control system and control method.

A second object of the present invention is to provide a program information transmission apparatus and transmission method which can transmit a program information as an audio information signal together with an audio signal.

Yet another object of the present invention is to provide a program reservation apparatus and a program reservation method which enables to readily carry out a program reservation by using a program information indicated by an audio information signal fed together with an audio signal to be transmitted.

Still another object of the present invention is to provide a program reservation apparatus and a program reservation method which enable to readily carry out a program reservation by using a program information indicated by an audio information signal recorded and reproduced together with an audio signal via a recording medium.

The audio control signal transmission apparatus according to the present invention includes a control instruction input means for specifying a control instruction to be transmitted;

audio control signal generating means for generating an audio control signal corresponding to the control instruction specified by the control instruction input means; and signal output means for outputting the audio signal to be transmitted and the audio control signal generated by the audio control signal generating means; wherein the output means outputs an audio control signal corresponding to the control instruction and an audio signal.

Moreover, the audio control signal reception apparatus according to the present invention includes signal input means for extracting an audio control signal which has been fed together with an audio signal; control instruction determining means for determining a control instruction given as an audio control signal extracted by the signal input means; and control instruction output means for outputting the control instruction determined by the control instruction specifying means; wherein the control instruction output means outputs a control instruction corresponding to an audio control signal fed to the signal input means.

Moreover, the audio control signal reception apparatus according to the present invention includes signal input means for extracting an audio control signal which has been fed together with an audio signal; control instruction specifying means for specifying a control instruction given as an audio control signal extracted by the signal input means; and execution means to be controlled for executing the control instruction determined by the control instruction specifying

means; wherein the execution means to be controlled is controlled by executing a control instruction corresponding to an audio control signal fed to the signal input means.

@ The audio control signal based control system according to the present invention includes: an audio control signal transmission apparatus for transmitting an audio control signal corresponding to a control instruction and an audio signal to be transmitted; and an apparatus to be controlled, which receives an audio control signal transmitted together with an audio signal from the audio control signal transmission apparatus and executes a control instruction given by the audio control signal received, wherein the apparatus to be controlled is controlled by a control instruction corresponding to an audio control signal transmitted from the audio control signal transmission apparatus.

Moreover, the audio control signal based control system according to the present invention includes: an audio control signal transmission apparatus for transmitting an audio control signal corresponding to a control instruction and an audio signal to be transmitted; an audio control signal reception apparatus which receives an audio control signal transmitted together with an audio signal from the audio control signal transmission apparatus and outputs as a sound wave a control instruction corresponding to the audio control signal; and an execution apparatus to be controlled for executing the control instruction outputted as a sound wave from this audio control signal reception apparatus; wherein the execution apparatus to

be controlled is controlled by a control instruction corresponding to an audio control signal transmitted from the audio control signal transmission apparatus.

Furthermore, the audio control signal based control method according to the present invention includes: a step of generating an audio control signal corresponding to a control instruction determined; a step of transmitting the audio control signal together with an audio signal to be transmitted; a step of receiving the audio control signal together with the audio signal; a step of extracting the audio control signal received; and a step of executing a control instruction given by the audio control signal.

The program information transmission apparatus according to the present invention includes: program information input means for inputting a program information to be transmitted; audio information signal generating means for generating an audio information signal corresponding to a program information entered by the program information input means; signal multiplexing means for multiplexing an audio signal to be transmitted, with the audio information signal generated by the audio information signal generating means; and transmission means for transmitting the audio information signal and the audio signal which have been multiplexed by the signal multiplexing means, wherein a program information is transmitted as an audio information signal together with an audio signal. Moreover, the program information transmission method according to the present invention is characterized in

that an audio information signal is generated according to a program information entered, and an audio signal to be transmitted is multiplexed with the audio information signal so as to be transmitted together with the audio signal. For example, the audio signal to be transmitted and the audio information signal corresponding to a program information are transmitted by way of time division. Alternatively, an audio information signal corresponding to the program information is superimposed on the audio signal to be transmitted. As the audio information signal corresponding to a program information, it is possible to transmit a program information by a DTMF signal string. Moreover, it is possible to transmit a program information by an audio information signal indicating a G code. Furthermore, it is possible to transmit a program information by a DTMF signal string indicating a G code.

Moreover, the program reservation apparatus according to the present invention includes: reception means for receiving an audio information signal indicating a program information transmitted together with an audio signal to be transmitted; program information specifying means for extracting the audio information signal received by the reception means and specifying a program information indicated by the audio information signal; program information storage means for storing the program information determined by the program information specifying means; control means for controlling the reception means; and input means for inputting a set information to the control means; wherein the control means,

according to a reservation set information entered by the input means, by using a program information stored in the program information storage means, controls the reception means to reserve a program to be received and receive the program reserved. Furthermore, the program reservation method is characterized in that control is made to execute: a step of receiving a program information transmitted together with an audio signal to be transmitted; a step of specifying and storing a program information indicated by the audio information signal received; a step of using a program information stored, according to a reservation set information entered, and reserving a program to be received; and a step of receiving the program reserved.

@ Moreover, the program reservation apparatus according to the present invention includes: reception means for receiving an audio information signal indicating a program information transmitted together with an audio signal to be transmitted; recoding/reproduction means for recording and reproducing via a recording medium the audio information signal together with the audio signal received by the reception means; program information specifying means for extracting the audio information signal reproduced by the recording/reproduction means, so as to determine a program information indicated by the audio information signal; program information storage means for storing the program information determined by the program information specifying means; control means for controlling the reception means; and input means for inputting a set

information to the control means; wherein the control means, according to a reservation set information entered by the input means, by using a program information stored in the program information storage means, controls the reception means and the recording/reproduction means to reserve a program to be received and receive the program reserved. Furthermore, the program reservation method according to the present invention is characterized in that control is made so as to execute: a step of receiving a program information transmitted together with an audio signal to be transmitted; a step of recording/reproducing via a recording medium the audio information signal together with the audio signal received; a step of extracting the audio information signal reproduced so as to specify a program information indicated by the audio information signal; a step of storing the program specified; a step of using a program information stored, according to a reservation set information entered, so as to reserve a program to be received; and a step of receiving the program reserved.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is block diagram showing a configuration of an audio control signal transmission apparatus according to the present invention.

Fig. 2 is a block diagram showing a configuration of an encoder provided in the aforementioned audio control signal transmission apparatus.

Fig. 3 is a block diagram showing a configuration of an

audio control signal reception apparatus according to the present invention.

@ Fig. 4 is a block diagram showing a configuration of a decoder provided in the aforementioned audio control signal reception apparatus according to the present invention.

@ Fig. 5 is block diagram showing another configuration of the audio control signal transmission apparatus according to the present invention.

@ Fig. 6 is a block diagram showing a configuration example of a television transmission apparatus according to the present invention.

@ Fig. 7 is a block diagram showing a configuration example of a television reception apparatus according to the present invention.

Fig. 8 shows nominal frequencies of a DTMF signal.

Fig. 9 is a block diagram showing a configuration of an encoder which outputs a DTMF signal string as an audio control signal according to a control instruction.

Fig. 10 is a block diagram showing a decoder configuration corresponding to an encoder which outputs a DTMF signal string as an audio control signal.

Fig. 11 shows a correspondence between control instructions for executing an operation control of a television reception apparatus and audio control signals.

Fig. 12 shows a configuration of a control system for controlling operation of a video/audio signal recording and reproducing apparatus by way of audio output of a television

reception apparatus.

@ Fig. 13 shows a correspondence between control instructions for executing an operation control of a video/audio signal recording and reproducing apparatus and audio control signals.

Fig. 14 is a block diagram showing another configuration example of a television transmission apparatus according to the present invention.

@ Fig. 15 is a block diagram showing another configuration example of a television reception apparatus according to the present invention.

@ Fig. 16 shows a correspondence between control instructions for executing a character display control of a television reception apparatus and audio control signals.

Fig. 17 is a block diagram showing an example of a program information transmission apparatus according to the present invention.

Fig. 18 shows program information items required for a program reservation at a reception side.

Fig. 19 is a block diagram showing a configuration of an encoder provided in the aforementioned program information transmission apparatus.

Fig. 20 is a block diagram showing an example of an audio signal reception/recording/reproduction apparatus according to the present invention.

Fig. 21 is a block diagram showing a configuration of a decoder provided in the aforementioned audio signal reception/recording/reproduction apparatus.

Fig. 22 is a block diagram showing a configuration example of a television transmission apparatus according to the present invention.

Fig. 23 is a block diagram showing a configuration example of a video deck according to the present invention.

Fig. 24 is a block diagram showing a configuration of an encoder which outputs a DTMF signal string as an audio information signal according to a control instruction.

Fig. 25 is a block diagram showing a configuration of a decoder which corresponds to an encoder which outputs a DTMF signal string as an audio information signal.

Fig. 26 shows a DTMF signal string used in a video recording system.

Fig. 27 is a flowchart showing a processing algorithm of a video recording reservation.

Fig. 28 shows a screen on which it is displayed that a program information has been fetched.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

Hereinafter, description will be directed to embodiments of the present invention with reference to the attached drawings.

Fig. 1 is a block diagram showing an example of an audio control signal transmission apparatus according to a first embodiment of the present invention.

The audio control signal transmission apparatus shown in Fig. 1 includes: a control instruction input block 11 which

determines a control instruction to be transmitted; an encoder 12 connected to this control instruction input block 11; a signal switching block 14 having an input terminal 12 connected to the encoder 12; an amplifier block 15 connected to the signal switching block 14; and a transmission block 16 to which an output signal of the amplifier block 15 is fed.

In this audio control signal transmission apparatus 10, the control instruction input block 11 determines a control instruction to be transmitted and supplies the control instruction to the encoder 12. The encoder 12 creates an audio control signal according to the control instruction supplied from the control instruction input block 11 and supplies the created audio control signal to the signal switching block 14.

Here, the encoder 12, as shown in Fig. 2, includes: a microcomputer 12A, a storage block 12B containing a correspondence table between control instructions and audio control signals; and a D/A converter block 12C which is supplied with an audio control signal information which is read out from the storage block 12B. In this encoder 12, the microcomputer 12A, according to a control instruction supplied from the control instruction input block 11, reads out an audio control signal information from the storage block 12B and supplies the information to the D/A converter block 12C. The D/A converter block 12C converts the audio control signal information read from the storage block 12B, into an analog signal so as to create an audio control signal and supplies the audio control signal to the signal switching block 14.

Moreover, the signal switching lock 14 is supplied via the input terminal 13 with an audio signal to be transmitted and switches this audio signal to the audio control signal created by the encoder 12 so as to supply the audio signal and the audio control signal as a time division multiplexed signal to the amplifier block 15. It should be noted that the audio signal includes signals of a frequency band which can be heard by a human and the audio control signal includes specific audio signals which are related with one-to-one correspondence to particular control instructions according to a predetermined rule. The amplifier block 15 amplifies the time division multiplexed signal supplied from the signal switching block 14, and supplies the amplified signal to the transmission block 16.

Furthermore, the transmission block 16 transmits the time division multiplexed signal which has been amplified by the amplifier block 15, i.e., the aforementioned audio signal and the audio control signal, as a radio wave via an antenna 17. It should be noted that in this embodiment, the signal is transmitted via an antenna but it can also be transmitted by using other transmission means such as a cable.

The audio control signal transmission apparatus 10 having the aforementioned configuration functions as an audio control signal transmission apparatus for transmitting via the antenna 17 as a radio wave an audio control signal and an audio signal which have been time division multiplexed according to a control instruction to be transmitted.

Next, Fig. 3 is a block diagram showing an example of an

audio control signal reception apparatus according to the present invention.

The audio control signal reception apparatus 20 of Fig. 3 receives a time division multiplexed signal, i.e., an audio signal and an audio control signal transmitted as a radio wave from the aforementioned audio control signal transmission apparatus 10 of Fig. 1, and includes: a reception block 22 for receiving the aforementioned time division multiplexed signal via an antenna 21; an amplifier block 23 connected to this reception block 22; an audio signal output block 24 and a decoder 25 which are connected to this amplifier 24; a control instruction output block 26 connected to this decoder 25; and the like.

In this audio control signal reception apparatus 20, the reception block 22 demodulates an audio signal from the signal received via the antenna 21 and supplies the audio signal to the amplifier block 23. Moreover, the amplifier block 23 amplifies the audio signal which has been demodulated by the reception block 22 and supplies the amplified audio signal to the audio signal output block 24 and to the decoder 25.

The audio signal output block 24 includes a loud speaker for output of the audio signal which has been amplified by the amplifier block 23.

Moreover, the decoder 25 extracts from the audio signal amplified by the amplifier block 23, an audio control signal which is related with one-to-one correspondence to a control instruction, so as to identify a control instruction

transmitted and supplies the control instruction to the control instruction output block 26. The control instruction output block 26 outputs the control instruction determined by the decoder 25.

Here, the decoder, as shown in Fig. 4 for example, includes: a band pass filter 25A which is supplied with an audio signal which has been amplified by the amplifier block 23; an A/D converter which is supplied with an output signal of the band pass filter 25A; a microcomputer 25C supplied with an information as a digitized output signal of the band pass filter 25A which has been digitized by the A/D converter block 25B; a storage block 25D containing a correspondence table indicating correspondence between control instructions and audio control signals.

In this decoder 25, the band pass filter 25A allows to pass only an audio signal of a frequency band of an audio control signal and extracts from the audio signal amplified by the amplifier block 23 only an audio control signal for supply to the A/D converter block 25B. The A/D converter block 25B digitizes the audio control signal extracted by the band pass filter 25A and supplies an audio control signal information to the microcomputer 25C. The microcomputer 25C, according to the audio control signal information, references the correspondence table between control instructions and audio control signals stored in the storage block 25D and outputs a control instruction corresponding to the audio control signal.

By combining the aforementioned audio control signal

transmission apparatus 10 and the audio control signal reception apparatus 20, it is possible to constitute a control system for transmitting a control instruction according to an audio control signal. In this case, it is possible to carry out an audio signal switching in the signal switching block 14 of the audio control signal transmission apparatus 10 in an extremely short period of time or to carry out switching according to a waveform of an audio signal inputted so that the audio control signal is hardly heard by the human ear.

It should be noted that instead of transmitting the audio signal and the audio control signal as a radio wave, it is also possible to transmit the audio signal and the audio control signal via a signal transmission path.

Moreover, Fig. 5 is a block diagram showing an audio control signal transmission apparatus according to another embodiment of the present invention.

The audio control signal transmission apparatus 30 shown in Fig. 5 includes: a control instruction input block 31 which determines a control instruction to be transmitted; an encoder 32 connected to this control instruction input block 31; an audio signal superimposing block 34 connected to the encoder 32 and an input terminal 33; an amplifier block 35 connected to this audio signal superimposing block 34; a transmission block 36 supplied with an output signal of the amplifier block 35; and the like.

In this audio control signal transmission apparatus 30, the encoder 32 generates an audio control signal corresponding

to a control instruction determined to be transmitted by the control instruction input block 31 and supplies the generated audio control signal to the audio signal superimposing block 34. The audio signal superimposing block 34 is supplied via the input terminal 33 with an audio signal to be transmitted and superimposes on this audio signal the aforementioned audio control signal generated by the encoder 32 for supply to the amplifier block 35.

Moreover, the amplifier block 35 amplifies the audio signal superimposed with the audio control signal by the signal superimposing block 34 for supply to the transmission block 36.

Furthermore, the transmission block 36 transmits the audio signal amplified by the amplifier block 35, i.e., the audio signal superimposed by the audio control signal, as a radio wave via an antenna 37.

The audio control signal transmission apparatus 30 having the aforementioned configuration functions as an audio control signal transmission apparatus for transmitting an audio signal superimposed with an audio control signal corresponding to a control instruction to be transmitted, as a radio wave via the antenna 37.

In the control system for transmitting a control instruction by way of an audio control signal constituted by combination of the audio control signal transmission apparatus and the audio control signal reception apparatus according to the present invention, a control instruction to be transmitted is transmitted together with an audio (sound) signal.

Consequently, the present invention can be applied to an apparatus having a function of receiving an audio signal such as a television reception apparatus, radio reception apparatus, video/audio signal reception/recording/reproduction apparatus, and the like. Moreover, it is possible not only to externally output a control instruction by way of an audio control signal transmitted but also to control the apparatus itself.®

Moreover, Fig. 6 is a block diagram showing a configuration of a television transmission apparatus to which the present invention is applied.

The television transmission apparatus 40 shown in Fig. 6 includes: a control instruction input block 41 which determines a control instruction to be transmitted; an encoder 42 connected to this control instruction input block 41; a signal switching block 44 connected to this encoder 42 and to a sound signal input terminal 43; a sound signal amplifier block 45 connected to this signal switching block 44; a video signal amplifier 47 connected to a video signal input terminal 46; a transmission block 48 connected to the sound signal amplifier block 45 and to the video signal amplifier block 47; and the like.

In this television transmission apparatus 40, the encoder 42 generates an audio control signal corresponding to a control instruction determined to be transmitted by the control instruction input block 41 and supplies this audio control signal to the audio signal switching block 44. The signal switching block 44 is supplied via the audio signal input

terminal 43 with a sound (audio) signal to be transmitted. This sound signal is superimposed by the aforementioned audio control signal generated by the encoder 42, so as to be supplied to the sound (audio) signal amplifier block 45. The sound signal amplifier block 45 amplifies the sound signal which has been imposed with the audio control signal by the signal switching block 44, and supplies the amplified signal to the transmission block 48. Moreover, the video signal amplifier block 47 amplifies a video signal supplied via a video signal input terminal 46 and supplies the amplified signal to the transmission block 48.

The transmission block 48 transmits via an antenna 49, the sound signal amplified by the sound signal amplifier block 45, i.e., the sound signal superimposed with the audio control signal and the video signal amplified by the video signal amplifier block 47, as a television signal.®

The television transmission apparatus 40 having the aforementioned configuration can transmit a control instruction to be transmitted, by superimposing the control instruction signal on a sound signal which can be received by a television reception apparatus.

Fig. 7 is a block diagram showing a configuration of a television reception apparatus which corresponds to the aforementioned television transmission apparatus.

The television reception apparatus 50 shown in Fig. 7 includes: a tuner block 52 for receiving the aforementioned television signal via an antenna 51; a sound signal amplifier

block 53 and a video signal amplifier block 54 which are connected to this tuner block 52; a sound signal output block 55 and a decoder 56 which are connected to the sound signal amplifier block 53; a system controller 57 connected to this decoder 56; a monitor block 58 controlled by the system controller 57; a power control block 59; and the like.

In this television reception apparatus 50, the tuner block 52 demodulates a sound signal and a video signal from the television signal received via the antenna 51 and supplies the sound signal to the sound signal amplifier block 53 and the video signal to the video signal amplifier block 54.

The sound signal amplifier block 53 amplifies the sound signal which has been demodulated by the tuner block 52, and supplies the demodulated signal to the sound signal output block 55 and to the decoder 56.

The sound signal output block 55 outputs from a loud speaker the audio signal amplified by the sound signal amplifier block 53. Moreover, the decoder 56 extracts from the audio signal amplified by the audio signal amplifier block 53, an audio control signal related to a control instruction on one-to-one basis, so as to identify the control instruction transmitted and supplies the control instruction to the system controller 57. The system controller 57 executes the control instruction determined by the decoder 56 so as to control the monitor block 58 and the power control block 59 according to the control instruction.

Moreover, the video signal amplifier block 54 amplifies

the video signal demodulated by the tuner block 52, for supply to the monitor block 58. The monitor block 58 executes a video display by the video signal amplified by the video signal amplifier block 54. Furthermore, the power control block 59 controls a power system of the entire apparatus.

The television reception apparatus 50 having the aforementioned configuration receives a television signal transmitted from the aforementioned television transmission apparatus 40 so as to obtain an audio output and a video output by the audio signal and the video signal and to execute a control instruction corresponding to an audio control signal superimposed on the aforementioned audio signal, thus enabling to control the monitor block 58 and the power control block 59.

That is, by combining the aforementioned television transmission apparatus 40 and the television reception apparatus 50, it is possible to constitute a control system using an audio control signal in which a control signal is superimposed as an audio control signal on an audio signal of a television signal transmitted by the television transmission apparatus 40, so as to control the television reception apparatus.

Here, in the aforementioned control system by an audio control signal constituted by the combination of the television transmission apparatus 40 and the television reception apparatus 50, instead of a time division transmission by switching between an audio signal and an audio control signal, it is possible to employ a method in which an audio signal is

superimposed on an audio control signal for transmission and the reception side demodulates the modulates the audio signal so that the audio control signal is isolated from the demodulated audio signal.

It should be noted that it is possible to use any featured audio signal associated with a control instruction on one-to-one basis according to a predetermined rule, but it is preferable to use a signal which has a low possibility that an audio signal which is not an audio control signal is incorrectly identified as an audio control signal by the reception side.

As the audio control signal having such a low possibility of incorrect identification, for example, it is possible to use a DTMF (dual tone multi-frequency) signal string.

The DTMF signal is already used in practice for a telephone push line. As shown in Fig. 8, the DTMF signal is defined as 16 signals obtained by four audio signals, each having a different frequency: 697 Hz, 770 Hz, 852 Hz, and 941 Hz in combination with four audio signals, each having a different frequency: 1209 Hz, 1336 Hz, 1477 Hz, and 1633 Hz. A 16-pushbutton dial 60 is assigned for the 16 signals thus obtained.

That is, in the DTMF signal, for example, an audio signal of 1209 Hz superimposed by an audio signal of 697 Hz indicates "1".

A circuit for generating the DTMF signal is available on the market as an integrated circuit of DTMF tone encoder. For

example, if "1" is entered, the DTMF encoder outputs an audio signal of 1209 Hz superimposed on an audio signal of 697 Hz. Moreover, a circuit for extracting a DTMF signal from an input audio signal is available on market as an integrated circuit fDTMF tone decoder. If an input audio signal contains both of the audio signal of 1209 Hz and the audio signal of 697 Hz, the DTMF tone decoder outputs "1".

Fig. 9 is a block diagram showing a configuration of an encoder for generating a DTMF signal string as an audio control signal corresponding to a control instruction.

The encoder 70 shown in Fig. 9 includes: a microcomputer 71; a storage block 72 containing a table of correspondence between control instructions and DTMF signal strings; and a DTMF tone encoder 73.

In this encoder 70, the microcomputer 71, according to a control instruction inputted, references the table of correspondence between control instructions and DTMF signal strings stored in the storage block 72 and supplies to the DTMF tone encoder 73, a control information indicating a DTMF signal string corresponding to the control instruction inputted. The DTMF tone encoder 73, according to the control information supplied by the microcomputer 71, outputs a DTMF signal string corresponding to the control instruction.

By using the encoder 70 having the aforementioned configuration, it is possible to constitute an audio control signal transmission apparatus for transmitting a DTMF signal string as an audio control signal corresponding to a control

instruction.

Moreover, Fig. 10 is a block diagram showing a configuration of a decoder 80 which corresponds to the decoder 70 shown in Fig. 9.

The decoder 80 of Fig. 10 includes: a DTMF tone decoder 81; a microcomputer 82; and a storage block 83 containing a table of correspondence between control instructions and DTMF signal strings.

In this decoder 80, the DTMF tone decoder 81 analyzes frequency components contained in the audio signal inputted and supplies to the microcomputer 82 a decode information indicating a DTMF signal string inputted as the audio signal. The microcomputer 82, according to the decode information supplied from the DTMF tone decoder 81, references the table of correspondence between control instructions and DTMF signal strings stored in the storage block 83 and outputs a control instruction corresponding to the inputted DTMF signal string indicated by the aforementioned decode information.

@ By using the decoder 80 having the aforementioned configuration, it is possible to constitute an audio control signal reception apparatus for receiving a DTMF signal string as an audio control signal corresponding to a control instruction.

Consequently, by using the aforementioned encoder 70 as the aforementioned encoder 12, 32, 42 in the audio control signal transmission apparatus 10, 30 and the television transmission apparatus 40, and by using the aforementioned

decoder 80 as the aforementioned decoder 25, 56 in the audio control signal reception apparatus 20 and the television reception apparatus 50, it is possible to constitute a control system using an audio control signal which can transmit a DTMF signal as an audio control signal so as to control the audio control signal reception apparatus 20 and the television reception apparatus 50.

Here, Fig. 11 shows an example of table of correspondence between control instructions for controlling the television reception apparatus 50 and audio control signals.

In the table of correspondence shown in Fig. 11, "video output off", i.e., a control instruction to inhibit a video output corresponds to a DTMF signal string of "1#". Moreover, "video output on", i.e., a control instruction to output a video corresponds to a DTMF signal string of "2#". Furthermore, "power off", i.e., a control instruction to turn off power corresponds to a DTMF signal string of "3#".

Consequently, by transmitting from the television transmission apparatus 40 a television signal containing the audio control signals, i.e., DTMF signal strings defined in the table of correspondence in Fig. 11, it is possible to control the television reception apparatus 50 as follows. If a television signal containing the DTMF signal of "1#" is received, the television reception apparatus 50 is controlled not to execute video output. Moreover, if a television signal containing the DTMF signal string of "2#" is received, the television reception apparatus 50 is controlled to output

video. Furthermore, if a television signal containing the DTMF signal string of "3#" is received, the television reception apparatus 50 is controlled so as to turn off power of the entire apparatus.

It should be noted that Fig. 11 shows an example of table of correspondence between control instructions for controlling the television reception apparatus 50 and audio control signals, but any apparatus having an audio signal reception function such as a radio reception apparatus and a video/audio signal reception/recording/reproduction apparatus can be controlled according to a control instruction transmitted as an audio control signal.

Here, in the control system using an audio control signal constituted by combination of the aforementioned television transmission apparatus 40 and the television reception apparatus, instead of time division transmission by switching between an audio signal to an audio control signal, it is possible to employ a method in which an audio signal is superimposed on an audio control signal so that the reception side can isolate/extract the audio control signal from the audio signal demodulated.

Moreover, an audio signal and an audio control signal need not be always transmitted as a radio wave but can be transmitted as a sound wave from a loud speaker so that an audio control signal is entered via a microphone to an apparatus to be controlled.

For example, by superimposing on an audio signal to be

transmitted, an audio control signal corresponding to a control instruction for controlling operation of a video/audio signal recording/reproduction apparatus, as shown in Fig. 12, it is possible to constitute a control system for controlling operation of the video/audio signal recording/reproduction apparatus via the television reception apparatus 50 which receives the aforementioned television signal.

In the control system shown in Fig. 12, the video/audio signal recording/reproduction apparatus 90 has the encoder 80 shown in Fig. 10 as a built-in component so that the audio control signal outputted together with the audio signal from the audio output block 55 of the television reception apparatus 50 is entered via a microphone 91 to the aforementioned encoder 80.

Here, a control instruction for controlling operation of the aforementioned video/audio signal recording/reproduction apparatus 90 may be Power ON, Power OFF, Stop, and the like which are assigned for the DTMF signals as shown in a table of correspondence between control instructions and audio control signals shown in Fig. 13.

In this control system, if the audio output block 55 of the aforementioned television reception apparatus 50 outputs an audio signal containing an audio control signal consisting of, for example, a DTMF signal string of "21#", the aforementioned video/audio signal recording/reproduction apparatus 90 executes a control instruction specified by the audio control signal so that an operation control is

automatically carried out to turn on power corresponding to the DTMF signal string of "21#". Moreover, this video/audio signal recording/reproduction apparatus 90 executes a control instruction given by the audio control signal, so as to execute an operation control such as cutting off power corresponding to a DTMF signal string of "22#" and starting recording corresponding to a DTMF signal string of "23#".

Moreover, the aforementioned audio control signal can be used not only for giving an operation control instruction for controlling operation of an apparatus to be controlled but also for giving a character display control instruction for character display.

Fig. 14 is a block diagram showing a configuration of a television transmission apparatus for giving as an audio control signal, a character display control instruction for character display.

The television transmission apparatus 100 shown in Fig. 14 includes: a character information input block 101 for specifying a character information to be transmitted; an encoder connected to this character information input block 101; a signal switching block 104 connected to the encoder 102 and to an audio signal input terminal 103; an audio signal amplifier block 105 connected to this signal switching block 104; a video signal amplifier block 107 connected to a video signal input terminal 106; a transmission block 108 connected to the aforementioned audio signal amplifier block 105 and the video signal amplifier block 107; and the like.

In this television transmission apparatus 100, the encoder 102 generates an audio control signal corresponding to a character information determined to be transmitted by the character information input block 101, and supplies the audio control signal to the audio signal switching block 104. The aforementioned signal switching block 104 is supplied via the input terminal 103 with an audio signal to be transmitted, and superimposes on this audio signal the audio control signal generated by the encoder 102, so as to be supplied to the audio signal amplifier block 105. The audio signal amplifier 105 amplifies the audio signal superimposed with the audio control signal by the signal switching block 104, for supply to the transmission block 108. Moreover, the video signal amplifier block 107 amplifies a video signal supplied via the video signal input terminal 104, and transmits the amplified video signal to the transmission block 108.

The transmission block 108 transmits the audio signal amplified by the audio signal amplifier block 105, i.e., the audio signal superimposed with the audio control signal and the video signal amplified by the video signal amplifier block 107, as a television signal via an antenna 109.

In the television transmission apparatus 100 having the aforementioned configuration, it is possible to transmit a character information to be transmitted by superimposing the character information on an audio signal which can be received by a television reception apparatus.

Fig. 15 is a block diagram showing a configuration of a

television reception apparatus 110 which corresponds to the aforementioned television transmission apparatus 100.

The television reception apparatus 110 shown in Fig. 15 includes: a tuner block 112 for receiving the aforementioned television signal via an antenna 111; an audio signal amplifier block 113 and a video signal amplifier block 114 which are connected to the tuner block 112; an audio signal output block 115 and a decoder 116 which are connected to the audio signal amplifier block 113; a character generator 117 connected to the decoder 116; a monitor block 118 supplied with an output of the video signal amplifier block 114 and an output of the character generator 117.

In this television reception apparatus 110, the tuner block 112 demodulates an audio signal and a video signal from the television signal received via the antenna 111, and supplies the audio signal to the audio signal amplifier block 113 and the video signal to the video signal amplifier block 114.

The audio signal amplifier block 113 amplifies the audio signal demodulated by the tuner block 112 and supplies the demodulated signal to the audio signal output block 115 and to the decoder 116.

The audio signal output block 115 outputs from a loud speaker the audio signal amplified by the audio signal amplifier block 113. Moreover, the decoder 116 extracts an audio control signal corresponding to a character information, from the audio signal amplified by the audio signal amplifier

block 113, so as to identify a character information transmitted and supplies this character information to the character generator 117. The character generator 117 supplies to the monitor block 118, a character display signal for displaying the character information determined by the decoder 116.

Moreover, the video signal amplifier block 14 amplifies the video signal demodulated by the tuner block 112, for supply to the monitor block 118. The monitor block 118 executes an image display by the video signal amplified by the video signal amplifier block 14 and executes a character display according to a character display signal supplied from the character generator 117, i.e., a screen display of the character information determined by the decoder 116.

Here, Fig. 16 shows an example of correspondence between character information items for displaying a character information by the television reception apparatus 100 and audio control signals.

In the table of correspondence shown in Fig. 16, a character information "A" corresponds to a DTMF signal string of "001#". Moreover, a character information "B" corresponds to a DTMF signal string of "002#". Furthermore, a character information "AB" corresponds to a DTMF signal string of "003#". As shown in Fig. 16, in the correspondence between character information items and audio control signals, one character need not correspond to one audio control signal. By relating a character string which has a high transmission frequency to one

audio control signal, it is possible to transmit a character information with a high efficiency.

The television reception apparatus 110 having the aforementioned configuration receives a television signal transmitted from the aforementioned television transmission apparatus 100, which enables not only to obtain a sound output and an image output according to the audio signal and the video signal but also to display on a screen by the monitor block 118 a character information corresponding to an audio control signal transmitted as superimposed on the aforementioned audio signal.

That is, by using the aforementioned television transmission apparatus 100 in combination with the television reception apparatus 110, it is possible to constitute a control system in which a character information is superimposed as an audio control signal on an audio signal of a television signal, so as to control to execute a character display by the television reception apparatus 110.

It should be noted that in a control system constituted by using the aforementioned television transmission apparatus 100 in combination with the television reception apparatus 110., instead of time division transmission by switching an audio signal to an audio control signal, it is possible to employ a method in which an audio signal is superimposed on an audio control signal for transmission so that the audio control signal is isolated/extracted from the audio signal demodulated by the reception side.

Fig. 17 is a block diagram showing an example of program information transmission apparatus according to another embodiment of the present invention.

The program information transmission apparatus 120 shown in Fig. 17 includes: a program information input block 211; an encoder 212 connected to this program information input block 211; a signal switching block 214 having an input terminal 213 connected to the encoder 212; a transmission block 215 connected to the signal switching block 214; and the like.

In this program information transmission apparatus 210, as shown in Fig. 18, the program information input block 211 supplies to the encoder 212 a program information including information required for a program reservation at a reception side including a broadcast date, broadcast start time, broadcast end time, broadcast channel, and the like.

Here, the encoder 212, as shown in Fig. 19 for example, includes: a microcomputer 212A; a storage 212B containing a table of correspondence between program information items and audio information signals; and a D/A converter block 212C supplied with a digital signal of an audio information signal which is read out from the storage block 212B. In this encoder 212, the microcomputer 212A, according to an information supplied from the program information input block 211, reads out an audio information signal from the storage block 212B for supply to the D/A converter 212C. The D/A converter 212C converts the audio information signal read out from the storage block 212B, into an analog signal for supply to the signal

switching block 214.

The signal switching block 214 is supplied via the input terminal 213 with an audio signal to be transmitted and switches this audio signal to the audio information signal generated by the encoder 212 so that the audio signal and the audio information signal are time-division multiplexed for supply to the transmission block 215. It should be noted that the audio signal is a signal of frequency band which can be heard by a human ear. Moreover, the audio information signal is a featured audio signal based on one-to-one correspondence with a program information according to a predetermined rule.

The aforementioned transmission block 215 transmits the time-division multiplexed signal, i.e., the audio signal and the audio information signal supplied from the signal switching block 214, as a radio wave via an antenna 216.

The program information transmission apparatus 210 having the aforementioned configuration serves as a radio broadcast apparatus which transmits an audio information signal indicating a program information and an audio signal which have been time-division multiplexed, as a radio wave via the antenna 216.

Next, Fig. 20 is a block diagram showing an example of audio signal reception/recording/reproduction apparatus according to the present invention.

The audio signal reception/recording/reproduction apparatus 220 shown in Fig. 20 receives a time-division multiplexed signal, i.e., an audio signal and an audio

information signal transmitted as a radio wave from the program information transmission apparatus 210 shown in Fig. 17, and includes: a reception block 222 for receiving the aforementioned time-division multiplexed signal via an antenna 221; an audio signal recording/reproduction block 223, an audio signal output block 224, and a decoder 225 which are connected to this reception block 222; a program information storage block 226 connected to this decoder 225; a control block 227 for controlling the reception block 222 and the audio signal recording/reproduction block 223; an input block 228 for giving a user set information to the control block 227; and the like.

In this audio signal reception/recording/reproduction apparatus 220, the reception block 222, according to a control instruction from the control block 227, demodulates an audio signal from the signal received via the antenna 221. The reception block 222 supplies the demodulated audio signal to the audio signal recording/reproduction block 223, the audio signal output block 224, and the decoder 225.

Moreover, the audio signal recording/reproduction block 223, according to a control instruction from the control block 227, records on a recording medium 229 an audio signal supplied from the reception block 222 or reproduces an audio signal from the recording medium 229 for supply to the audio signal output block 224.

Furthermore, the audio signal output block 224 includes a loud speaker and outputs an audio signal supplied from the reception block 222 or the audio signal recording/reproduction

block 223.

Moreover, the decoder 225 extracts from the audio signal received by the reception block 222, an audio information signal related to a program information based on one-to-one correspondence, so as to identify a program information transmitted and supplies this program information to the program information storage block 226. The program information storage block 226 stores the program information determined by the decoder 225.

Furthermore, the control block 227 includes a microcomputer. According to a program reservation information entered through the input block 228, the control block 227 controls the reception block 222 and the audio signal recording/reproduction block 223 so as to carry out a program reservation based on a program information stored in the program information storage block 226 and record on the recording medium 229 an audio signal of the program reserved.

Here, the decoder 225, as shown in Fig. 21 for example, includes: a band pass filter 225A supplied with an audio signal received by the reception block 222; an A/D converter block 225B which is supplied with an output signal of the band pass filter 225A; a microcomputer 225C which is supplied with an output signal of the band pass filter 225A which has been digitized by the A/D converter block 225B; and a storage block 225D containing a table of correspondence between program information and audio information signals.

In this decoder 225, the band pass filter 225A allows to

pass only an audio signal having a frequency band of the audio information signal and extracts from the audio signal received by the reception block 222, an audio information signal for supply to the A/D converter block 225B. The A/D converter block 225B digitizes the audio information signal extracted by the band pass filter, for supply to the microcomputer 225C. The microcomputer 225C, according to the audio information signal, references the table of correspondence between program information and audio information signals stored in the storage block 225D and outputs a program information corresponding to the audio information signal.

By using the aforementioned program information transmission apparatus 210 in combination with the aforementioned audio signal reception/recording/reproduction apparatus 220, it is possible to constitute a program reservation system for carrying out a program reservation by transmitting a program information by way of an audio information signal. In this case, it is possible to carry out switching of an audio signal by the signal switching block 214 of the program information transmission apparatus 210 in an extremely short time or to carry out switching according to a waveform of an audio signal entered so that a program information signal is intentionally made difficult to be heard by a human ear.

It should be noted that instead of transmitting the audio signal and the audio information signal by air, it is also possible to transmit the audio signal and the audio information

signal via a signal transmission path.

Moreover, in the audio signal reception/recording/reproduction apparatus 220 shown in Fig. 20, an audio signal received by the reception block 222 is supplied to the decoder so that the decoder 225 extracts an audio information signal so as to obtain a program information. Instead, it is also possible that an audio signal containing an audio information signal received by the reception block 222 is recorded on the recording medium 229 by the audio signal reception/recording/reproduction block 223 and an audio signal reproduced from the recording medium 229 is supplied to the decoder 225 so that the decoder 225 extracts an audio information signal so as to obtain a program information.

Next, explanation will be given on a video recording reservation system to which the present invention is applied.

This video recording system is constituted by a television broadcast apparatus 240 having a configuration shown in Fig. 22 and a video deck 250 having a configuration shown in Fig. 23.

The television transmission apparatus 240 shown in Fig. 22 to which the program information transmission apparatus according to the present invention is applied includes: a program information input block 241; an encoder 242 connected to this program information input block 241; an audio signal switching block 244 connected to the encoder 242 and an audio signal input terminal 243; a transmission block 246 connected to the signal switching block 244 and a video signal input

terminal 245; and the like.

In this television transmission apparatus 240, the encoder 242 generates an audio information signal corresponding to a program information supplied from the program information input block 241 and supplies the audio information signal to the audio signal switching block 244. The audio signal switching block 244 is supplied via the audio signal input terminal 243 with an audio signal to be transmitted and superimposes on this audio signal the audio information signal generated by the encoder 242 for supply to the transmission block 246.

The transmission block 246 transmits a video signal supplied via the video signal input terminal 244 and the audio signal superimposed with the audio information signal by the audio signal switching block 244, as a television signal via an antenna 247.

The television transmission apparatus 240 having the aforementioned configuration can transmit a program information as an audio information signal superimposed on an audio signal which can be received by a television reception apparatus.

Fig. 23 is a block diagram showing a configuration of a video deck 250 on which a television tuner corresponding to the aforementioned television transmission apparatus 240 is mounted.

The video deck 250 shown in Fig. 23 includes: a tuner block 252 for receiving the aforementioned television signal via an antenna 251; a video/audio signal recording/reproduction block 253, a video signal output block 254, an audio signal

output block 255, and a decoder 256 which are connected to the tuner 252; a program information storage block 257 connected to the decoder 256; a control block 258 for controlling the tuner block 252 and the video/audio signal recording/reproduction block 253; an input block 259 for supplying a user set information to the control block 258; and the like.

In this video deck 250, the tuner block 252, according to a control instruction from the control block 258, demodulates an audio signal and a video signal from the television signal received via the antenna 231. The video signal demodulated by this tuner block 252 is supplied to the video/audio signal recording/reproduction block 253 and, via the video signal output block 254, outputted externally. Moreover, the audio signal demodulated is supplied to the video/audio signal recording/reproduction block 253 and to the decoder 256, and outputted externally via the audio signal output block 255.

Moreover, the vide/audio signal recording/reproduction block 253, according to a control instruction from the control block 258, records on a recording medium 160 a video signal and an audio signal supplied from the tuner block 252, or reproduces from the recording medium 160 a video signal and an audio signal and outputs the signals externally via the video signal output block 254 and the audio signal output block 255.

Moreover, the decoder 256 extracts from the audio signal demodulated by the tuner block 252, an audio information signal based on one-to-one correspondence with a program information,

so as to identify a program information transmitted and supplies the program information to the program information storage block 257. The program information storage block 257 stores the program information determined by the decoder 256.

The control block 258 includes a microcomputer. According to a program reservation set information inputted from the input block 259 having an operation key or the like, the control block 258 controls the aforementioned tuner block 252 and the video/audio signal recording/reproduction block 253 to carry out a program reservation according to a program information stored in the program information storage block 257 and to record on the recording medium 259 an audio signal of the program reserved.

Here, in a video recording reservation system using an audio information signal constituted by using the aforementioned television transmission apparatus 240 in combination with the video deck 250, instead of time-division transmission by switching of an audio signal to an audio information signal, it is possible to employ the method in which an audio signal superimposed on an audio information signal is transmitted so that the audio information signal is isolated/extracted from the audio signal demodulated by the reception side.

It should be noted that the audio information signal may be any audio signal featured on one-to-one correspondence with a program information according to a predetermined rule. However, it is preferable to use a signal having a low

possibility of incorrect identification of an audio signal other than an audio information signal as an audio information signal by the reception side.

As an audio information having a low possibility of the aforementioned incorrect identification, for example, it is possible to use a DTMF (dual tone multi-frequency) signal.

This DTMF signal is identical as the one shown in the aforementioned Fig. 8, and its explanation is omitted here.

Fig. 24 is a block diagram showing a configuration of encoder for generating a DTMF signal string as an audio information signal corresponding to a program information.

The encoder 270 shown in Fig. 23 includes: a microcomputer 271; a storage block 272 containing a table of correspondence between program information items and DTMF signal strings; and a DTMF tone encoder 273.

In this encoder 270, the microcomputer 271, according to a program information entered, references the table of correspondence between a program information and DTMF signal strings stored in the storage block 272 and supplies to the DTMF tone encoder 273, a control information indicating a DTMF signal string corresponding to the program information entered. The DTMF tone encoder 273, according to the control information given by the microcomputer 271, outputs a DTMF signal string corresponding to the program information.

By using the encoder 270 having the aforementioned configuration, it is possible to constitute a program information signal transmission apparatus for transmitting a

DTMF signal string as an audio information signal corresponding to a program information.

Moreover, Fig. 25 is a block diagram showing a configuration of a decoder 280 which corresponds to the encoder 270 shown in the aforementioned Fig. 24.

The decoder 280 shown in Fig. 25 includes: a DTMF tone decoder 281; a microcomputer 282; and a storage block 283 containing a table of correspondence between program information items and DTMF signal strings.

In this decoder 280, the DTMF tone decoder 281 analyzes a frequency component contained in an audio signal entered and supplies to the microcomputer 282 a decode information indicating the DTMF signal string entered as the audio signal. The microcomputer 282, according to the decode information supplied from the DTMF tone decoder 281, references the table of correspondence between program information items and DTMF signal strings stored in the storage block 283 and outputs a program information corresponding to the DTMF signal string entered.

By using the decoder 280 having the aforementioned configuration, it is possible to constitute a program information signal reception apparatus for receiving a DTMF signal string as an audio information signal corresponding to a program information.

Consequently, by using the aforementioned encoder 270 as the encoder 242 in the aforementioned television transmission apparatus 240 in combination with the aforementioned decoder

280 as the decoder 256 in the aforementioned video deck 250, it is possible to constitute an audio information signal based program reservation system capable of transmitting a DTMF signal string as an audio information signal corresponding to a program information, so as to control the vide deck 250.

It should be noted that instead of transmitting a television signal containing the aforementioned audio information signal as a radio wave, it is possible to transmit the television signal via a signal transmission path.

Moreover, in this video recording reservation system, an audio signal received by the tuner block 252 of the video deck 250 is supplied to the decoder 256 so that the decoder 256 extracts an audio information signal to obtain a program information, but it is also possible that a video/audio signal containing an audio information signal received by the tuner block 252 is recorded in the recording medium 259 by the video/audio signal reception/recording/reproduction block 253 and an audio signal reproduced from this recording medium 259 is supplied to the decoder, so that the decoder extracts an audio information signal to obtain a program information.

Here, Fig. 26 shows an example of table of correspondence between a program information items and audio information signals for controlling the aforementioned video deck 250.

In this table of correspondence, "#" and "*" used as a header to identify an audio information signal superimposed on an audio signal are assigned for data #0 and data #1; data #6 to #9 are assigned for a program start time; and data #10 to

#13 are assigned for a program end time. Furthermore, #14 to #16 are assigned for broadcast channels.

Consequently, for example, a program to be broadcast on March 30, from 12 o'clock 30 minutes to 14 o'clock 00 minutes at channel 12 constitutes a sound string of "#*033012301400012".

That is, the aforementioned television transmission apparatus 230 broadcasts a television signal containing an audio information signal indicating a sound string of "#*033012301400012" and the video deck 250 which has received the television broadcast can recognize the audio information signal contained in the television signal as a program information for a program to be broadcast on March 30, from 12 o'clock 00 minute to 14 o'clock 00 minute, at channel 12. According to a program reservation set information entered from the input block, the aforementioned program information can be specified for video recording reservation.

It should be noted that instead of the DTMF signal, a G code can be created as the audio information signal corresponding to a program information to be transmitted so that the program information is transmitted by an audio information signal indicating the G code. Moreover, as the G code is constituted by combinations of numeric 0 to 9, it is possible to convert this G code into a DTMF signal for transmission.

Moreover, the video deck 250 in the aforementioned video recording reservation system carries out a video recording

reservation according to an algorithm shown in a flowchart of Fig. 27.

That is, according to this algorithm of video recording reservation, firstly, in step S1, it is decided whether a program information is obtained. This decision is repeatedly made until a program information is obtained. When a program information is obtained, control is passed to the next step S2.

In step S2, a mark indicating that a program information has been obtained is superimposed on a video signal for output from the video signal output block 254. Thus, as shown in Fig. 28 for example, a mark M is displayed on the screen indicating that a program information has been obtained.

Next, in step S3, a decision is made whether a reservation set information entered from the input block 259 has been accepted. If no reservation set information has been accepted, control is passed to step S4. If a reservation set information has been accepted, control is passed to step S5.

In step S4, a decision is made whether a predetermined period of time has elapsed after a program information is fetched. If the predetermined period of time has not been elapsed, control is returned to step S3 so as to repeatedly execute the decision processing whether a reservation set information has been accepted. Moreover, if the aforementioned predetermined period of time has elapsed, control is passed to step S6.

In step S5, a program reservation is carried out according to the program information fetched, and control is passed to

step S6.

In step S6, output of the mark indicating that a program information has been fetched, from the video signal output block 54 is terminated, and control is returned to step S1.

That is, in this video deck 250, when an audio information signal is received and a program information is fetched, as shown in Fig. 28, a mark M indicating that a program information has been fetched is superimposed on a video signal for output from the video signal output block 254 for a predetermined period of time, during which a reservation set information entered from the input block 259 is accepted for carrying out a program reservation.

It should be noted that in the video deck 250 which carries out a video recording reservation according to the aforementioned algorithm, only during a predetermined period of time while the mark M indicating that a program information has been fetched is superimposed on a video signal and outputted from the video signal output block 250, a program reservation can be carried out according to the program information fetched. However, it is also possible to retain a program information fetched, in the program information storage block 257 for a predetermined period such as one day so that in response to a reservation set information entered from the input block 259, a video reservation can be carried out according to the program information retained in the program information storage block 257.

Here, in the program reservation method according to the

present invention, a program information to be transmitted is transmitted as an audio information signal together with an audio signal. Consequently, the present invention can be applied to an apparatus having a function of receiving an audio signal such as a television reception apparatus, radio reception apparatus, video/audio signal reception/recording/reproduction apparatus. By using a program information indicated by the audio information signal, it is possible to readily carry out a program reservation.

In the audio control signal transmission apparatus according to the present invention, an audio control signal corresponding to a control instruction specified by the control instruction input means is created by the audio control signal generating means, so that an audio signal to be transmitted is outputted together with the audio control signal from the signal output means as a radio wave or sound wave. Consequently, it is possible to transmit an audio control signal corresponding to a control instruction specified by the control instruction input means, to reception means having a function for receiving the audio control signal.

In the audio control signal reception apparatus according to the present invention, an audio control signal inputted together with an audio signal to the signal input means is extracted so that a control instruction given as this audio control signal is specified by the control instruction specifying means and this control instruction is outputted from the control instruction output means. Consequently, it is

possible to supply to means to be controlled, a control instruction corresponding to an audio control signal entered through the signal input means.

Moreover, in the audio control signal reception apparatus according to the present invention, an audio control signal inputted together with an audio signal to the signal input means is extracted so that a control instruction given as this audio control signal is specified by the control instruction specifying means and this control instruction is executed, enabling to operate means to be controlled, by the control instruction corresponding to the audio control signal entered through the signal input means.

Moreover, in the audio control signal based control system according to the present invention, it is possible to control an apparatus to be controlled, by using a control instruction corresponding to an audio control signal transmitted from the audio control signal transmission apparatus.

Moreover, in the audio control signal based control system according to the present invention, an audio control signal reception apparatus is provided for outputting as a sound wave a control instruction corresponding to an audio control signal transmitted from an audio control signal transmission apparatus, thus enabling to control an apparatus to be controlled, via this audio control signal reception apparatus. That is, it is possible to control an apparatus to be controlled, by using a control instruction corresponding to an audio control signal transmitted from the audio control signal

transmission apparatus.

Furthermore, in the audio control signal based control method according to the present invention, an audio control signal is generated corresponding to a control instruction specified and the generated audio control signal is transmitted together with an audio signal to be transmitted, so that an apparatus to be controlled receives the audio control signal together with the audio signal, extracts the audio control signal, and executes a control instruction given by the audio control signal. Thus, it is possible to carry out control by way of a control instruction corresponding to an audio control signal.

In the program information transmission apparatus and transmission method according to the present invention, the audio information signal generating means generates an audio information signal corresponding to a program information entered by the program information input means, so that the audio information signal is multiplexed by the signal multiplexing means with an audio signal to be transmitted, thus enabling to transmit a program information as an audio information signal together with an audio signal.

Moreover, in the program reservation apparatus and the program reservation method according to the present invention, the reception means receives an audio information signal indicating a program information transmitted together with an audio signal to be transmitted, and the audio information signal received is extracted by the program information

specifying means, and a program information indicated by the audio information signal is stored in the program information storage means, so that according to a reservation set information entered by the input means, the control means controls the aforementioned reception means to use the program information stored in the program information storage means to reserve a program to be received and to receive the program reserved. Thus, by using a program information indicated by an audio information signal transmitted together with an audio signal to be transmitted, a program reservation can readily be carried out.

Furthermore, in the program reservation apparatus and the program reservation method according to the present invention, the reception means receives an audio information signal indicating a program information transmitted together with an audio signal to be transmitted, and the audio information signal received is recorded/reproduced via a recording medium by the recording/reproduction means, and the audio information signal reproduced is extracted by the program information specifying means, and a program information indicated by the audio information signal is stored in the program information storage means, so that according to a reservation set information entered by the input means, the control means can control the reception means to use a program information stored in the program information storage means, to reserve a program to be received, and receive the program reserved. Thus, by using a program information indicated by an audio information

signal recorded/reproduced together with an audio signal via recording medium, a program reservation can readily be carried out.

WHAT IS CLAIMED IS

1. An audio control signal transmission apparatus comprising:

control instruction input means for specifying a control instruction to be transmitted;

audio control signal generating means for generating an audio control signal corresponding to the control instruction specified by said control instruction input means; and

signal output means for outputting the audio signal to be transmitted and the audio control signal generated by said audio control signal generating means;

wherein said output means outputs an audio control signal corresponding to the control instruction and an audio signal.

2. An audio control signal transmission apparatus as claimed in Claim 1, said apparatus further comprising signal switching means for switching the audio signal to be transmitted, to the audio control signal generated by said audio control signal generating means.

wherein said signal output means outputs the audio control signal and the audio signal supplied via said signal switching means.

3. An audio control signal transmission apparatus as claimed in Claim 1, said apparatus further comprising signal superimposing means for superimposing the audio control signal

generated by said audio control signal generated means, on the audio signal to be transmitted,

wherein said signal output means outputs the audio signal superimposed with an audio control signal corresponding to a control instruction to be transmitted which is supplied via said signal superimposing means.

4. An audio control signal transmission apparatus as claimed in Claim 1, wherein said signal output means transmits to a signal transmission path an audio control signal corresponding to a control instruction and an audio signal to be transmitted.

5. An audio control signal transmission apparatus as claimed in Claim 1, wherein said signal output means is radio transmission apparatus and transmits as a radio wave, an audio control signal corresponding to a control instruction and an audio signal to be transmitted.

6. An audio control signal transmission apparatus as claimed in Claim 1, wherein said signal output means is audio output means and transmits an audio control signal corresponding to a control instruction and an audio signal to be transmitted, as a sound wave.

7. An audio control signal transmission apparatus as claimed in Claim 1, wherein said audio control signal

generating means generates as a control instruction to be transmitted, an audio control signal for giving an operation control instruction for controlling operation of an apparatus to be controlled.

8. An audio control signal transmission apparatus as claimed in Claim 1, wherein said audio control signal generating means generates as a control instruction to be transmitted, an audio control signal for giving a character display control instruction for character display control.

9. An audio control signal transmission apparatus as claimed in Claim 1, wherein said audio control signal generating means generates a DTMF signal string as an audio control signal corresponding to a control instruction to be transmitted.

10. An audio control signal reception apparatus comprising:

signal input means for extracting an audio control signal which has been fed together with an audio signal;

control instruction specifying means for specifying a control instruction given as an audio control signal extracted by said signal input means; and

control instruction output means for outputting the control instruction determined by said control instruction specifying means;

wherein said control instruction output means outputs a control instruction corresponding to an audio control signal fed to said signal input means.

11. An audio control signal reception apparatus as claimed in Claim 10, wherein said signal input means extracts an audio control signal from an audio signal and an audio control signal which have been time-division multiplexed, and supplies the audio control signal to said control instruction specifying means.

12. An audio control signal reception apparatus as claimed in Claim 10, wherein said signal input means extracts an audio control signal superimposed on an audio signal, and supplies the audio control signal to said control instruction specifying means.

13. An audio control signal reception apparatus as claimed in Claim 10, wherein said signal input means is supplied with an audio control signal and an audio signal via a signal transmission path and extracts from the audio control signal and the audio signal, an audio control signal and supplies the audio control signal to said control instruction specifying means.

14. An audio control signal reception apparatus as claimed in Claim 10, wherein said signal input means includes reception

means for receiving an audio control signal and an audio signal which have been transmitted as a radio wave.

15. An audio control signal reception apparatus as claimed in Claim 10, wherein said signal input means includes a microphone for detecting an audio control signal and an audio signal which have been outputted as a sound wave.

16. An audio control signal reception apparatus as claimed in Claim 10, wherein said signal input means extracts an audio control signal which gives an operation control instruction for controlling operation of an apparatus to be controlled.

17. An audio control signal reception apparatus as claimed in Claim 10, wherein said signal input means extracts an audio control signal which gives a character display control instruction for a character display control.

18. An audio signal reception apparatus as claimed in Claim 10, wherein said audio control signal generating means extracts a DTMF signal string as an audio control signal which gives a control instruction.

19. An audio control signal reception apparatus as claimed in Claim 10, said apparatus further comprising means to be controlled for executing a control instruction determined by said control instruction specifying means,

wherein a control instruction corresponding to an audio control signal fed to said signal input means is executed so as to control said means to be controlled.

20. An audio control signal based control system comprising:

an audio control signal transmission apparatus for transmitting an audio control signal corresponding to a control instruction and an audio signal to be transmitted; and

an apparatus to be controlled, which receives an audio control signal transmitted together with an audio signal from said audio control signal transmission apparatus and executes a control instruction given by the audio control signal received,

wherein said apparatus to be controlled is controlled by a control instruction corresponding to an audio control signal transmitted from said audio control signal transmission apparatus.

21. An audio control signal based control system as claimed in Claim 20, wherein said audio control signal transmission apparatus comprises: control instruction input means for specifying a control instruction to be transmitted; an audio control signal generating means for generating an audio control signal corresponding to a control instruction determined by said control instruction input means; and signal output means for outputting an audio signal to be transmitted

and an audio control signal generated by said audio control signal generating means, wherein said signal output means outputs an audio control signal corresponding to a control instruction and an audio signal to be transmitted.

22. An audio control signal based control system as claimed in Claim 20, wherein said apparatus to be controlled comprises: signal input means for extracting an audio control signal fed together with an audio signal; control instruction specifying means for specifying a control instruction given as an audio control signal extracted by said signal input means; and means to be controlled for executing the control instruction determined by said control instruction specifying means, wherein a control instruction corresponding to the audio control signal fed to said signal input means is executed.

23. An audio control signal based control system as claimed in Claim 20, said system comprising:

an audio control signal reception apparatus for outputting as a sound wave a control instruction corresponding to an audio control signal; and

an apparatus to be controlled for executing a control instruction outputted as a sound wave from said audio control signal reception apparatus,

wherein said apparatus to be controlled is controlled by a control instruction corresponding to an audio control signal transmitted from said audio control signal transmission

apparatus.

24. An audio control signal based control method comprising:

a step of generating an audio control signal corresponding to a control instruction determined;

a step of transmitting said audio control signal together with an audio signal to be transmitted

a step of receiving said audio control signal together with the audio signal;

a step of extracting the audio control signal received; and

a step of executing a control instruction given by said audio control signal.

25. An audio control signal based control method as claimed in Claim 24, wherein an audio signal to be transmitted and said audio control signal are switched between each other so as to be transmitted by way of time division.

26. An audio control signal based control method as claimed in Claim 24, wherein the audio signal to be transmitted is superimposed with said audio control signal when transmitted.

27. An audio control signal based control method as claimed in Claim 24, wherein an audio signal to be transmitted

and said audio control signal are transmitted via a signal transmission path.

28. An audio control signal based control method as claimed in Claim 24, wherein an audio signal to be transmitted and said audio control signal are transmitted as a radio wave.

29. An audio control signal based control method as claimed in Claim 24, wherein an audio signal to be transmitted and said audio control signal are transmitted as a sound wave.

30. An audio control signal based control method as claimed in Claim 24, wherein as said audio control signal, an operation control instruction is transmitted for controlling operation of an apparatus to be controlled.

31. An audio control signal based control method as claimed in Claim 24, wherein as said audio control signal, a character display control instruction is transmitted for a character display control.

32. An audio control signal based control method as claimed in Claim 24, wherein as said audio control signal, a DTMF signal string is transmitted.

33. A program information transmission apparatus comprising:

program information input means for inputting a program information to be transmitted;

audio information signal generating means for generating an audio information signal corresponding to a program information entered by said program information input means;

signal multiplexing means for multiplexing an audio signal to be transmitted, with the audio information signal generated by said audio information signal generating means; and

transmission means for transmitting the audio information signal and the audio signal which have been multiplexed by said signal multiplexing means,

wherein a program information is transmitted as an audio information signal together with an audio signal.

34. A program information transmission apparatus as claimed in Claim 33, wherein said signal multiplexing means is signal switching means for switching an audio signal to be transmitted, to an audio information signal generated by said audio signal information signal generating means.

35. A program information transmission apparatus as claimed in Claim 33, wherein said signal multiplexing means is signal superimposing means for superimposing an audio information signal generated by said audio information signal generating means, on an audio signal to be transmitted.

36. A program information transmission apparatus as

claimed in Claim 33, wherein said transmission means transmits to a signal transmission path, an audio information signal corresponding to a program information and an audio signal to be transmitted.

@ 37. A program information transmission apparatus as claimed in Claim 33, wherein said transmission means is radio transmission means for transmitting as a radio wave, an audio information signal corresponding to a program information and an audio signal to be transmitted.

@ 38. A program information transmission apparatus as claimed in Claim 33, wherein said audio information signal generating means generates a DTMF signal string as an audio information signal corresponding to a program information to be transmitted.

@ 39. A program information transmission apparatus as claimed in Claim 33, wherein said audio information signal generating means generates an audio information signal indicating a G code as a program information to be transmitted.

@ 40. A program information transmission apparatus as claimed in Claim 33, wherein said audio information signal generating means generates a DTMF signal string indicating a G code as a program information to be transmitted.

41. A program information transmission method comprising:
a step of generating an audio information signal
corresponding to a program information entered;

a step of multiplexing an audio signal to be transmitted,
with said audio information signal; and

a step of transmitting a program information as an audio
information signal together with an audio signal.

42. A program information transmission method as claimed
in Claim 41, wherein the audio signal and the audio information
signal corresponding to a program information are transmitted
by way of time division.

@ 43. A program information transmission method as claimed
in Claim 41, wherein the transmission is carried out by
superimposing the audio information signal corresponding to a
program information, on the audio signal to be transmitted.

44. A program information transmission method as claimed
in Claim 41, wherein a DTMF signal string is generated as the
audio information signal corresponding to a program information
to be transmitted, so that the program information is
transmitted by the DTMF signal string.

@ 45. A program information transmission method as claimed
in Claim 41, wherein an audio information signal indicating a
G code is generated as a program information to be transmitted,

so that the program information is transmitted by the the audio information signal indicating the G code.

@ 46. A program information transmission method as claimed in Claim 41, wherein a DTMF signal string indicating a G code is generated as a program information to be transmitted, so that the program information is transmitted by the DTMF signal string indicating the G code.

47. A program reservation apparatus comprising:

reception means for receiving an audio information signal indicating a program information transmitted together with an audio signal to be transmitted;

program information specifying means for extracting the audio information signal received by said reception means and specifying a program information indicated by said audio information signal;

program information storage means for storing the program information determined by said program information specifying means;

control means for controlling said reception means; and

input means for inputting a set information to said control means,

@ wherein said control means, according to a reservation set information entered by said input means, by using a program information stored in said program information storage means, controls said reception means to reserve a program to be

received and receive the program reserved.

48. A program reservation apparatus as claimed in Claim 47, said apparatus further comprising recording means for recording on a recording medium an audio signal received by said reception means,

wherein said control means, according to a reservation set information entered by said input means, by using a program information stored in said program information storage means, controls said reception means and said recording means to reserve a program to be recorded and to record on a recording medium an audio signal of the program reserved.

49. A program reservation apparatus as claimed in Claim 47, wherein

said reception means receives a video/audio signal, and

said control means, according to a reservation set information entered by said input means, by using a program information stored in said program information storage means, controls said reception means and said recording means to reserve a program to be recorded and to record on a recording medium a video/audio signal of the program reserved.

@ 50. A program reservation apparatus as claimed in Claim 49, wherein said control means controls to execute an image display of the program information stored by said program information storage means and accept a reservation set information entered

by said input means while said program information is displayed on a screen, thus carrying out a program reservation.

51. A program reservation apparatus as claimed in Claim 49, wherein said program information specifying means specifies a program information according to a DTMF signal string given as said audio information signal.

52. A program reservation apparatus as claimed in Claim 49, wherein said program information specifying means specifies a program information according to a G code given as said audio information signal.

53. A program reservation apparatus as claimed in Claim 49, wherein said program information specifying means specifies a program information according to a DTMF signal string indicating a G code given as said audio information signal.

54. A program reservation apparatus as claimed in Claim 49, wherein said control means specifies a program information according to a DTMF signal string indicating a G code given as said audio information signal.

@ 55. A program reservation apparatus as claimed in Claim 47, said apparatus further comprising recording/reproduction means for recording and reproducing via a recording means the audio information signal and the audio signal received by said

reception means,

wherein an audio information signal reproduced by said recording/reproduction means is extracted so that a program information indicated by said audio information signal is determined by said program information specifying means.

56. A program reservation method in which control is made comprising:

a step of receiving a program information transmitted together with an audio signal to be transmitted;

a step of specifying and storing a program information indicated by the audio information signal received;

a step of using a program information stored, according to a reservation set information entered, and reserving a program to be received; and

a step of receiving the program reserved.

57. A program reservation method as claimed in Claim 56, wherein control is made so that according to a reservation set information entered, a program information stored is used to reserve a program to be recorded in a recording medium, and

an audio signal of the program reserved is received and recorded on a recording medium.

58. A program reservation method as claimed in Claim 56, wherein control is made so that according to a reservation set information entered, a program information stored is used to

reserve a program to be recorded, and

a video/audio signal of the program reserved is received and recorded on a recording medium.

59. A program reservation method as claimed in Claim 56, wherein control is made to display on a screen a program information stored, and

a reservation set information is accepted while said program information is on a screen, so as to execute a program reservation.

60. A program reservation method as claimed in Claim 56, wherein a program information is determined according to a DTMF signal string given as said audio information signal.

61. A program reservation method as claimed in Claim 56, wherein a program information is determined according to a G code given as said audio information signal.

62. A program reservation method as claimed in Claim 56, wherein a program information is determined according to a DTMF signal string indicating a G code given as said audio information signal.

63. A program reservation method as claimed in Claim 56, wherein an audio information signal received is recorded/reproduced together with an audio signal via a

recording medium, and by extracting an audio information signal reproduced, a program information indicated by said audio information signal is determined.

ABSTRACT

An audio control signal transmission apparatus and reception apparatus, an audio control signal based control system and control method, a program information transmission apparatus and transmission method, and a program reservation apparatus and program reservation method which can realize a control system in which a control signal is superimposed on an audio signal so as to be transmitted and to operate at a distance a reception apparatus capable of receiving the signal and an apparatus connected to the reception apparatus.

220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
2199
2200
2201
2202
2203
2204
2205
2206
2207
2208
2209
2210
2211
2212
2213
2214
2215
2216
2217
2218
2219
2220
2221
2222
2223
2224
2225
2226
2227
2228
2229
2230
2231
2232
2233
2234
2235
2236
2237
2238
2239
2240
2241
2242
2243
2244
2245
2246
2247
2248
2249
2250
2251
2252
2253
2254
2255
2256
2257
2258
2259
2260
2261
2262
2263
2264
2265
2266
2267
2268
2269
2270
2271
2272
2273
2274
2275
2276
2277
2278
2279
2280
2281
2282
2283
2284
2285
2286
2287
2288
2289
2290
2291
2292
2293
2294
2295
2296
2297
2298
2299
2300
2301
2302
2303
2304
2305
2306
2307
2308
2309
2310
2311
2312
2313
2314
2315
2316
2317
2318
2319
2320
2321
2322
2323
2324
2325
2326
2327
2328
2329
2330
2331
2332
2333
2334
2335
2336
2337
2338
2339
2340
2341
2342
2343
2344
2345
2346
2347
2348
2349
2350
2351
2352
2353
2354
2355
2356
2357
2358
2359
2360
2361
2362
2363
2364
2365
2366
2367
2368
2369
2370
2371
2372
2373
2374
2375
2376
2377
2378
2379
2380
2381
2382
238

Declaration and Power of Attorney For Patent Application

特許出願宣言書及び委任状

Japanese Language Declaration

日本語宣言書

下記の氏名の発明者として、私は以下の通り宣言します。

As a below named inventor, I hereby declare that:

私の住所、私書簿、国籍は下記の私の氏名の後に記載された通りです。

My residence, post office address and citizenship are as stated next to my name.

下記の名称の発明に関して請求範囲に記載され、特許出願している発明内容について、私が最初かつ唯一の発明者（下記の氏名が一つの場合）もしくは最初かつ共同発明者であると（下記の名称が複数の場合）信じています。

I believe I am the original, first and sole inventor (if only one named is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled.

AUDIO CONTROL SIGNAL TRANSMISSION APPARATUS AND RECEPTION APPARATUS, CONTROL SYSTEM AND CONTROL METHOD USING AN AUDIO CONTROL SIGNAL, PROGRAM INFORMATION TRANSMISSION APPARATUS AND TRANSMISSION METHOD, AND PROGRAM RESERVATION APPARATUS AND PROGRAM RESERVATION METHOD

上記発明の明細書（下記の欄でx印がついていない場合は、本書に添付）は、

the specification of which is attached hereto unless the following box is checked:

☐ 月 日 に提出され、米国出願番号または特許協定条約国際出願番号を _____ とし、
（該当する場合） _____ に訂正されました。

was filed on _____ as United States Application Number or PCT International Application Number _____ and was amended on _____ (if applicable).

私は、特許請求範囲を含む上記訂正後の明細書を検討し、内容を理解していることをここに表明します。

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

私は、連邦規則法典第37編第1条56項に定義されるとおり、特許資格の有無について重要な情報を開示する義務があることを認めます。

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

私は、米国法典第35巻119条(a)-(d)項又は365条(b)項に基づき下記の、米国外の国の少なくとも一カ国を指定している特許協力条約365(a)項に基づく国際出願、又は外国での特許出願もしくは発明者証の出願についての外国優先権をここに主張するとともに、優先権を主張している、本出願の前に出願された特許または発明者証の外国出願を以下に、枠内をマークすることで、示しています。

I hereby claim foreign priority under Title 35, United States Code, Section 119(a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed.

Japanese Language Declaration 日本語宣言書			
Prior Foreign Application(s) 外国での先行出願		Priority Not Claimed 優先権主張なし	
<u>P09-201868</u> (Number) (番号)	<u>Japan</u> (Country) (国名)	<u>28 July 1997</u> (Day/Month/Year Filed) (出願年月日)	
<u>P09-201869</u> (Number) (番号)	<u>Japan</u> (Country) (国名)	<u>28 July 1997</u> (Day/Month/Year Filed) (出願年月日)	<u>X</u>
私は、第35編米国法典119条(e)項に基いて下記の米国特許出願規定に記載された権利をここに主張いたします。		I hereby claim the benefit under Title 35, United States Code, Section 119(e) of any United States provisional application(s) listed below.	
<u>(Application No.)</u> (出願番号)	<u>(Filing Date)</u> (出願日)	<u>(Application No.)</u> (出願番号)	<u>(Filing Date)</u> (出願日)
私は、下記の米国法典第35編120条に基いて下記の米国特許出願に記載された権利。又は米国を指定している特許協力条約365条(c)に基づく権利をここに主張します。また、本出願の各請求範囲の内容が米国法典第35編112条第1項又は特許協力条約で規定された方法で先行する米国特許出願に開示されていない限り、その先行米国出願を提出日以降で本出願書の日本国内または特許協力条約国際提出日までの期間中に入手された、連邦規則法典第37編1条56項で定義された特許資格の有無に関する重要な情報について開示義務があることを認識しています。		I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s), or 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code, Section 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of application.	
<u>(Application No.)</u> (出願番号)	<u>(Filing Date)</u> (出願日)	<u>(Status: Patented, Pending, Abandoned)</u> (現況: 特許許可済、係属中、放棄済)	
<u>(Application No.)</u> (出願番号)	<u>(Filing Date)</u> (出願日)	<u>(Status: Patented, Pending, Abandoned)</u> (現況: 特許許可済、係属中、放棄済)	

Japanese Language Declaration

日本語宣言書

私は、私自身の知識に基づいて本宣誓書中で私が行なう表明が真実であり、かつ私の入手した情報と私の信じていることに基づく表明が全て真実であると信じていること、さらに故意になされた虚偽の表明及びそれと同等の行いは米国法典第18編第1001条に基づき、罰金または拘禁、もしくはその両方により処罰されること、そしてそのような故意による虚偽の声明を行なえば、出願した、又は既に許可された特許の有効性が失われることを認識し、よってここに上記のごとく宣誓を致します。

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may be jeopardize the validity of the application or any patent issued thereon.

Japanese Language Declaration 日本語宣言書					
委任状: 私は下記の発明者として、本出願に関する一切の手続きを米特許商標局に対して遂行する弁理士または代理人として、下記の者を指名いたします。(弁理士、または代理人の氏名及び登録番号を明記のこと)			POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark office connected therewith (<i>list name and registration number</i>)		
Karl A. Limbach George C. Limbach John K. Uikeima Neil A. Smith Veronica C. Devitt Ronald L. Yin Gerald T. Sekimura Michael A. Stallman Philip A. Giarid Michael J. Pollock Stephen M. Everett Alfred A. Equitz	18,689 19,305 20,282 25,441 29,375 27,607 30,103 29,444 28,848 29,098 30,050 30,922	W. Patrick Bengtsson Mark A. Dalla Valle Charles P. Sammut Mark C. Pickering Kathleen A. Frost Alan S. Hodes Patricia Coleman James Alan A. Limbach Douglas C. Limbach Brian J. Keating Seong-Kun Oh* Cameron A. King	32,456 34,147 28,901 36,239 37,326 36,185 37,155 39,749 35,249 39,520 P-41,897	Kyla L. Harrel Mayumi Maeda Kent J. Tobin Christine S. Ring Michael R. Ward Steven M. Santisi Charles L. Hamilton Andrew V. Smith Heath W. Hoglund J. Thomas McCarthy * Recognition under 37 CFR 10.102	P-41,816 40,075 39,496 P-42,106 38,651 40,157 P-42,624 P-43,132 41,076 22,420
書類送付先			Send Correspondence to: Charles P. Sammut, Esq. Limbach & Limbach L.L.P. 2001 Ferry Building San Francisco, CA 94111-4262		
直接電話連絡先: (名前及び電話番号)			Direct Telephone Calls to: (<i>name and telephone number</i>) Charles P. Sammut (415) 433-4150		
唯一または第一発明者名			Full name of sole or first inventor: KOICHIRO WATANABE		
発明者の署名	日付	Inventor's signature		Date	
住所		Residence Saitama, Japan			
国籍		Citizenship Japan			
私書箱		Post Office Address c/o SONY CORPORATION 7-35, Kitashinagawa 6-chome Shinagawa-ku, Tokyo, JAPAN			

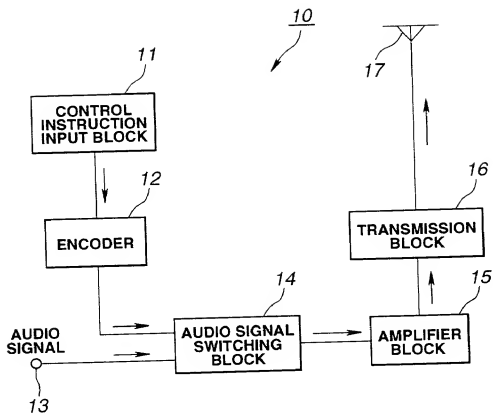


FIG.1

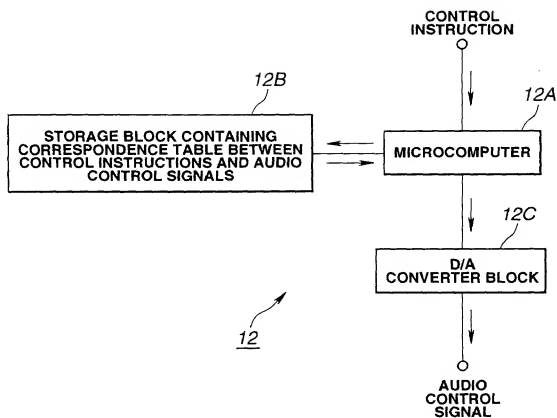


FIG.2

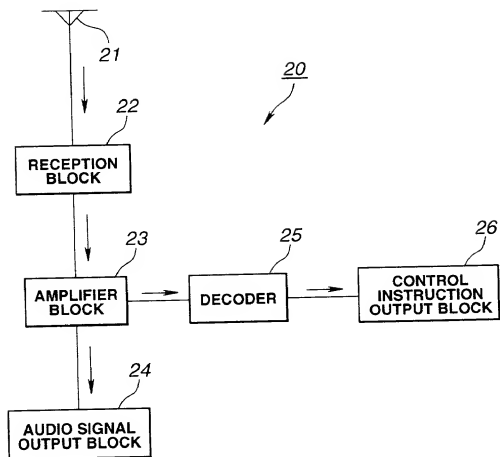


FIG.3

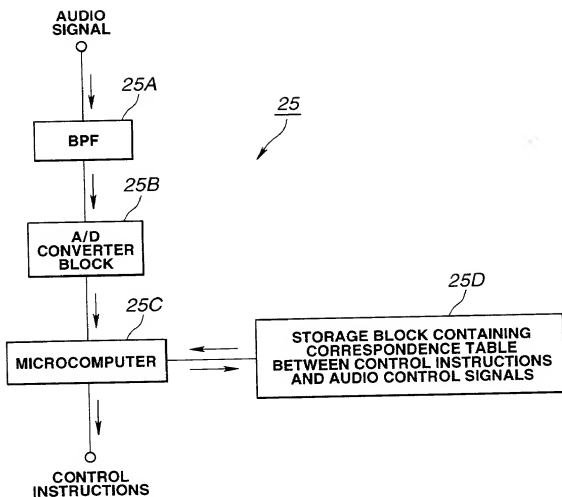


FIG.4

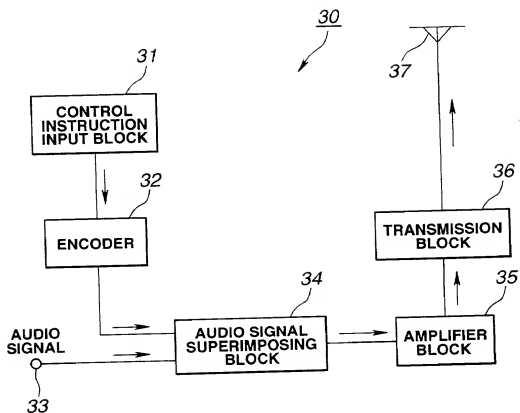


FIG.5

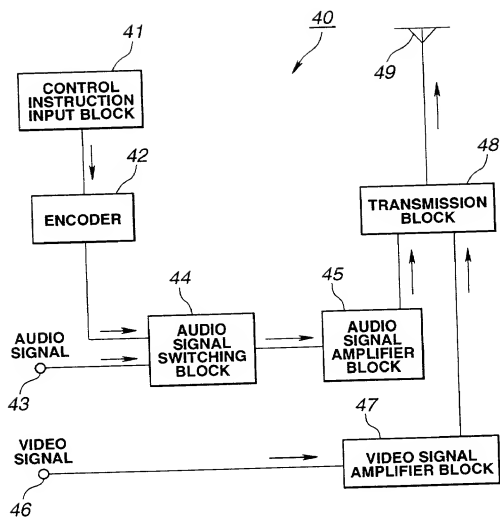


FIG.6

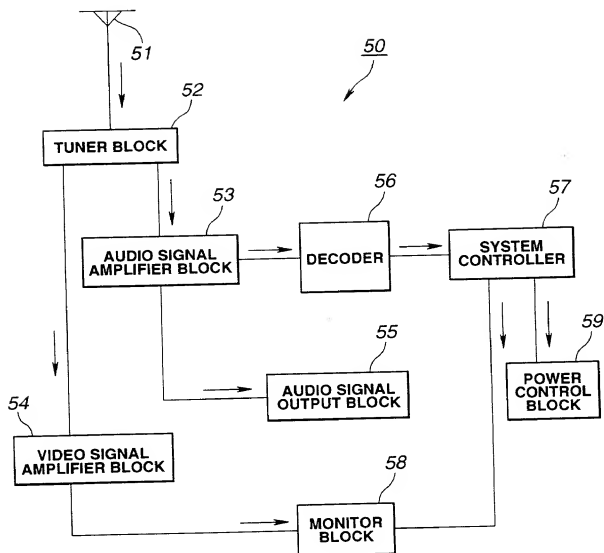


FIG.7

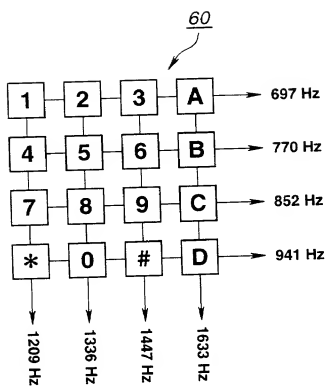


FIG.8

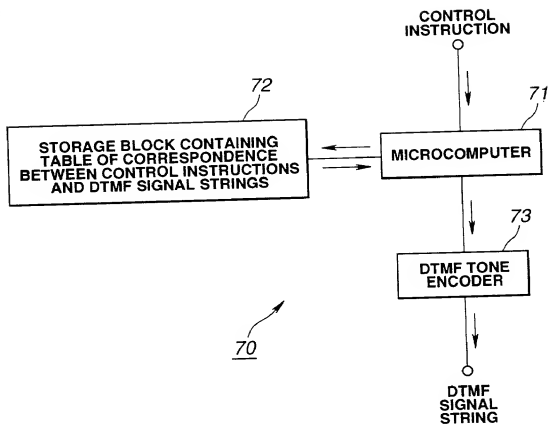


FIG.9

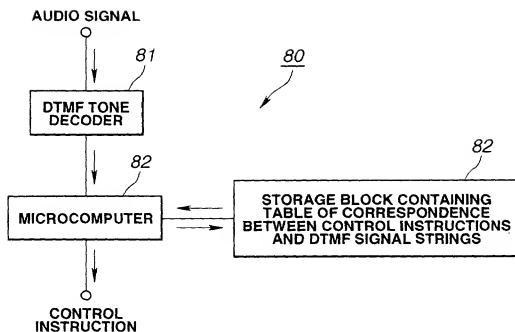


FIG.10

CONTROL INSTRUCTION	AUDIO CONTROL SIGNAL (DTMF SIGNAL STRING)
VIDEO OUTPUT OFF	1 #
VIDEO OUTPUT ON	2 #
POWER OFF	3 #

FIG.11

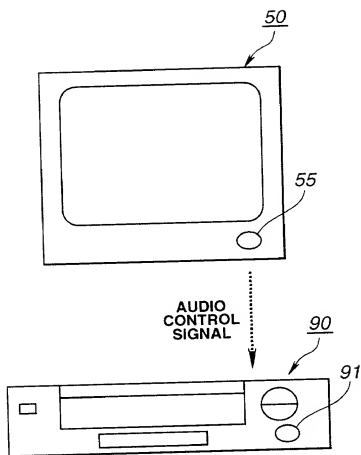


FIG.12

CONTROL INSTRUCTION	AUDIO CONTROL SIGNAL (DTMF SIGNAL STRING)
POWER ON	21#
POWER OFF	22#
VIDEO RECORDING START	23#
STOP	24#

FIG.13

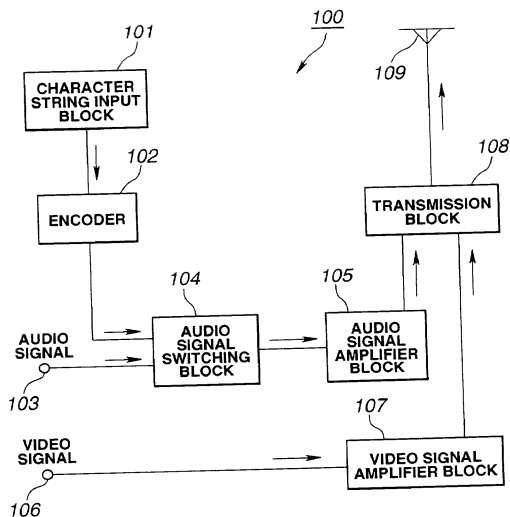


FIG.14

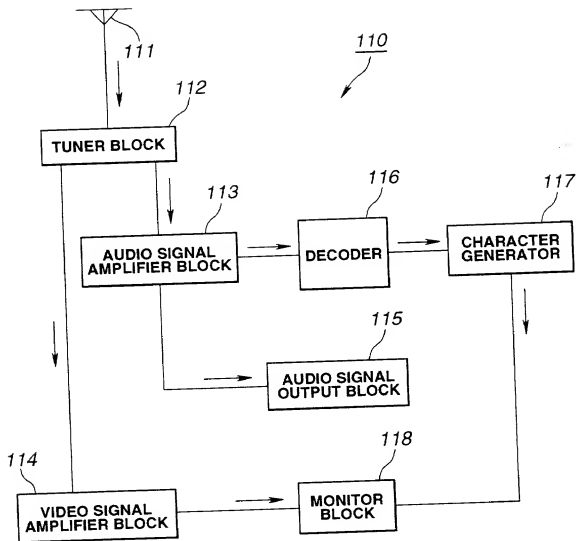


FIG.15

CHARACTER INFORMATION	AUDIO CHARACTER SIGNAL (DTMF SIGNAL STRING)
A	001 #
B	002 #
AB	003 #

FIG.16

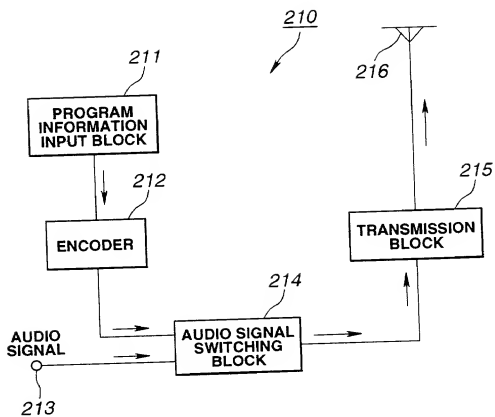


FIG.17

RECORDING DATE
RECORDING START TIME
RECORDING END TIME
BROADCAST CHANNEL

FIG.18

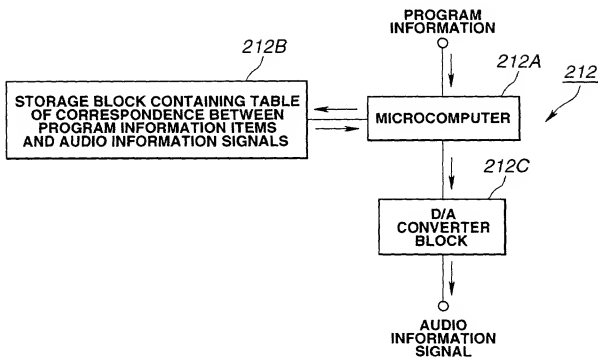


FIG.19

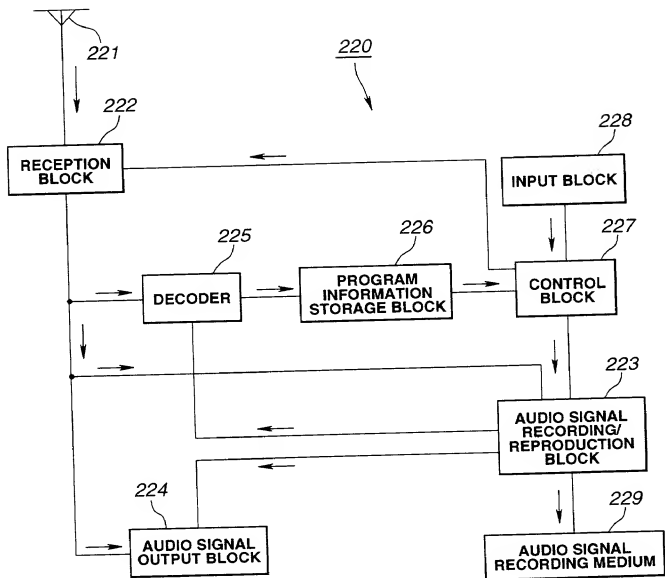


FIG.20

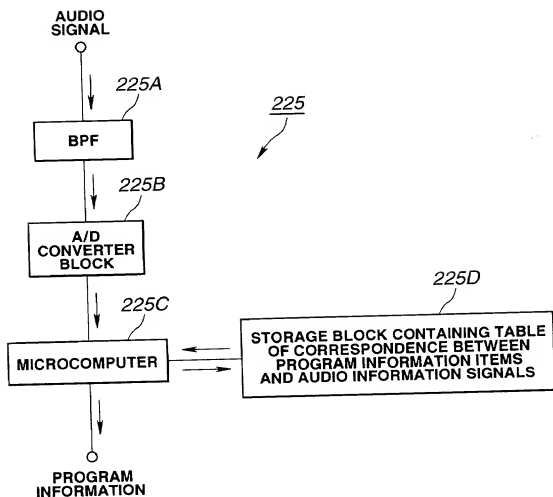


FIG.21

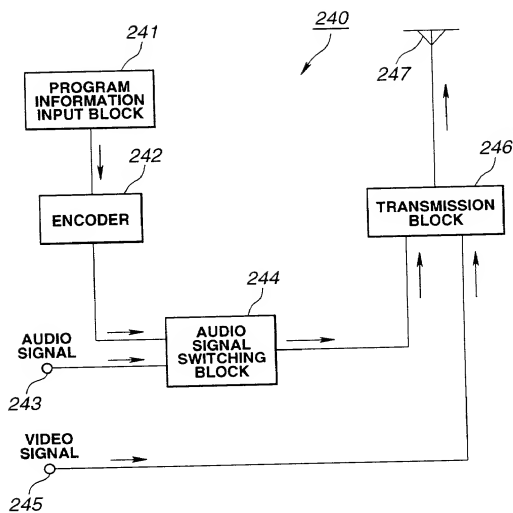


FIG.22

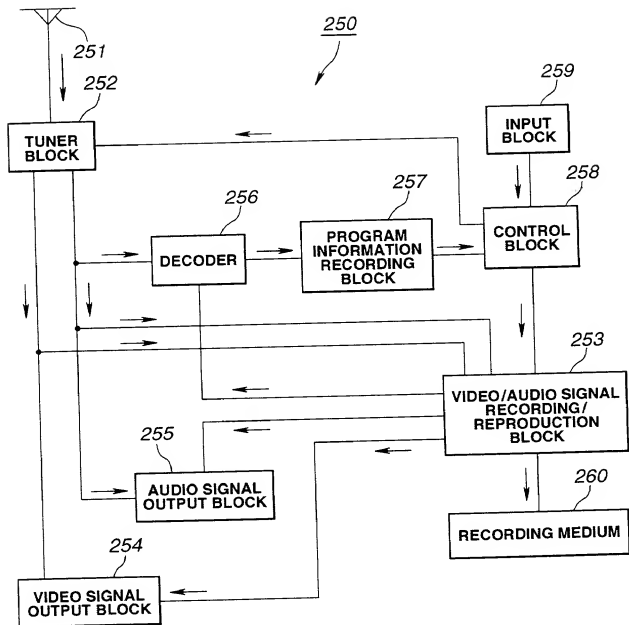


FIG.23

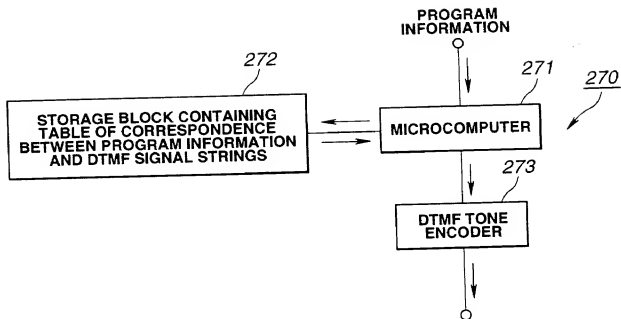


FIG.24

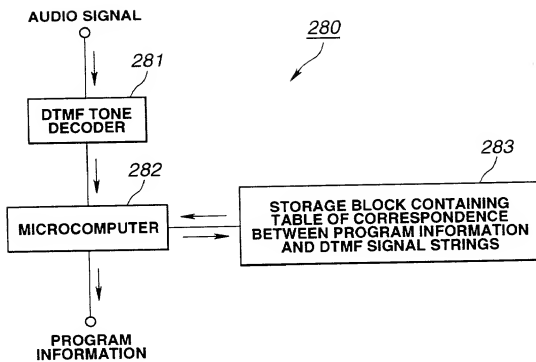


FIG.25

DATA No.	CONTENTS
DATA #0	[#]
DATA #1	[*]
DATA #2	PROGRAM BROADCAST DATE, MONTH 10'S POSITION
DATA #3	PROGRAM BROADCAST DATE, MONTH 1'S POSITION
DATA #4	PROGRAM BROADCAST DATE, DAY 10'S POSITION
DATA #5	PROGRAM BROADCAST DATE, DAY 1'S POSITION
DATA #6	PROGRAM START TIME, HOUR 10'S POSITION
DATA #7	PROGRAM START TIME, HOUR 1'S POSITION
DATA #8	PROGRAM START TIME, MINUTE 10'S POSITION
DATA #9	PROGRAM START TIME, MINUTE 1'S POSITION
DATA #10	PROGRAM END TIME, HOUR 10'S POSITION
DATA #11	PROGRAM END TIME, HOUR 1'S POSITION
DATA #12	PROGRAM END TIME, MINUTE 10'S POSITION
DATA #13	PROGRAM END TIME, MINUTE 1'S POSITION
DATA #14	BROADCAST CHANNEL, 100'S POSITION
DATA #15	BROADCAST CHANNEL, 10'S POSITION
DATA #16	BROADCAST CHANNEL, 1'S POSITION

FIG.26

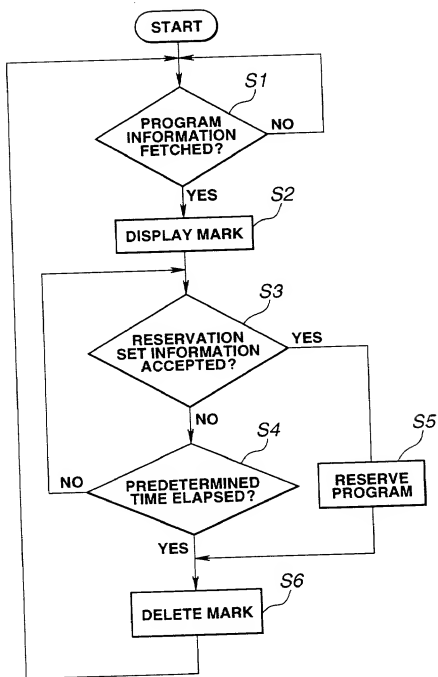


FIG.27

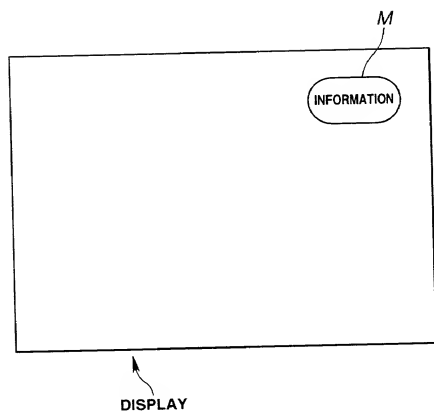


FIG.28